SCA Converter Adapter - SC414

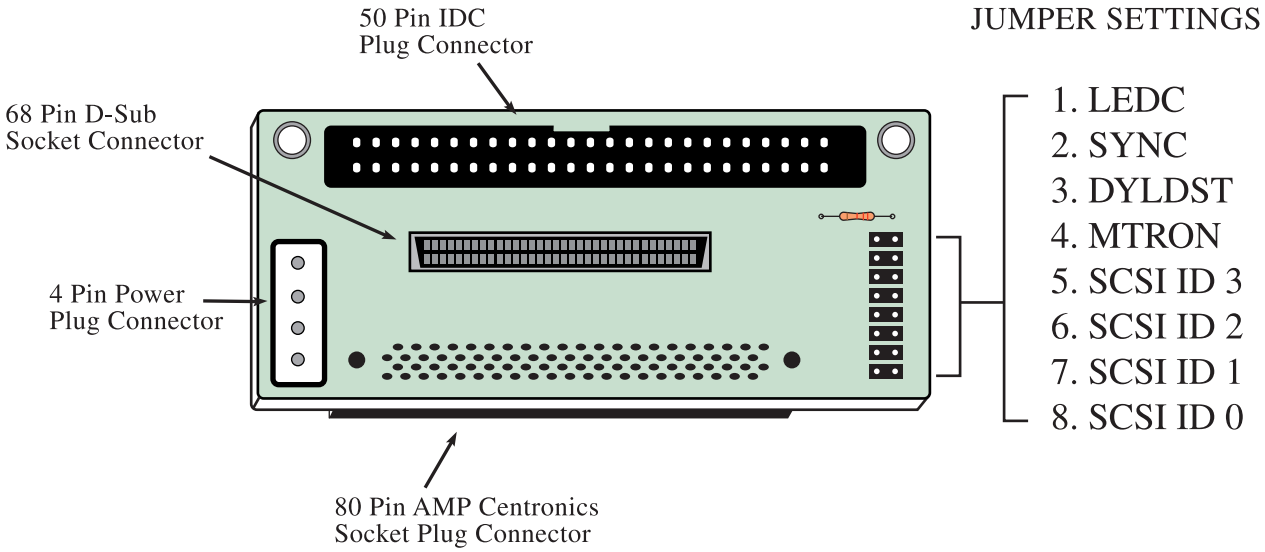

Jumper Setting Descriptions (1-4)

1. LEDC: Front panel LED signal, indicates drive activity for host front panel hard drive activity indicator.
2. SYNC: Synchronous spindle synchronizing signal generated by either host or drive.
3. DLYDST: Asserted by host to enable Delayed Motor Start Option (motor starts at power on or after a delay of 12 seconds times drive ID). This and [4. MTRON] are mutually exclusive options.
4. MTRON: Asserted by host to enable Motor Start Option (enables starting motor via SCSI bus bus command.)

SCSI ID Settings Chart (5-8)
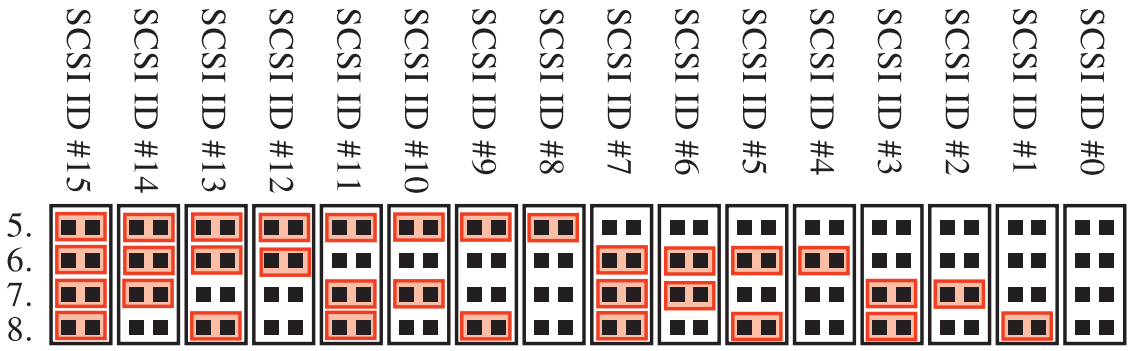
= Jumper